

VIZULO



SPARROW

2017

CE RoHS




COLOR OPTIONS




OTHER COLORS
AVAILABLE ON REQUEST

DIMENSIONS

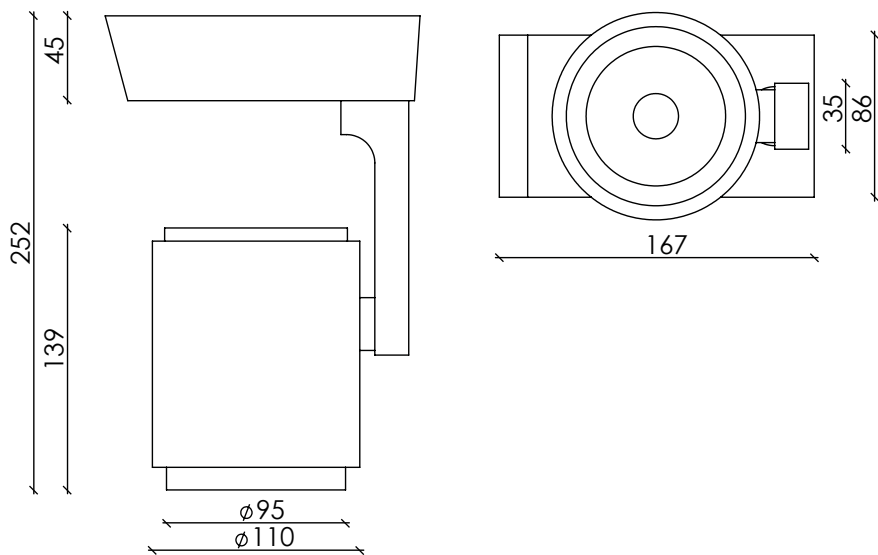

OPTIC



TYPE OF DIFFUSER




TECHNICAL INFORMATION

Voltage	220 ... 240 V
Frequency	50 Hz
Power	14 - 22 W
Luminous flux	Up to 2300 lm
Luminous efficacy	Up to 105 lm/W
Color rendering index	> 80/ >90
Correlated color temperature	3000/ 4000 K
Chromaticity tolerance (initial MacAdam)	3
Power factor	> 0,85
Ambient temperature	+10 ... +35 °C
Ingress protection	IP20
Insulation class	Class I
Body material	Steel with aluminium radiator
Cover type	No cover/ Clear glass
Beam angle	20°/30°/45°/55°
Dimming	Non - dimmable/DALI
Service life	50 000 h (L80B10) at ta = 25°C
Warranty	5 years

Technical parameters for final product can differ from typical data by 10% due to special conditions of LED manufacturing processes.

MODEL NAME PRINCIPLES

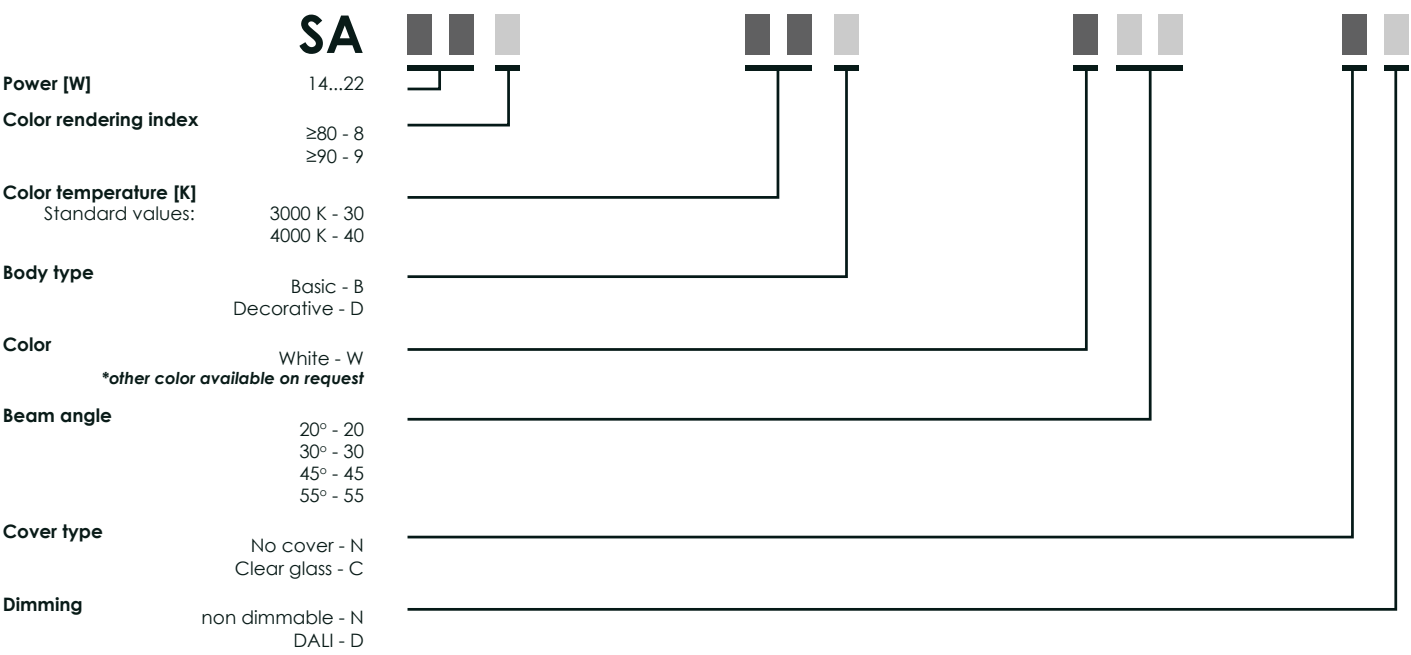

* OTHER CODES CAN BE GENERATED AFTER CUSTOMER REQUEST!