



vizulo

# Acorn

GEN2

CE RoHS

# Acorn



IP65

IK10



RoHS


|             |                                                       |                                                         |
|-------------|-------------------------------------------------------|---------------------------------------------------------|
| <b>V</b>    | 220 - 240                                             | DALI / Non dimmable                                     |
| <b>Hz</b>   | 50 - 60                                               | Chromaticity tolerance (initial MacAdam): 5             |
| <b>W</b>    | 50 - 270 <sup>1)</sup><br>50 - 200 <sup>2)</sup>      | Warranty 5 years<br>65 000 h (L90B10) at ta = 25°C      |
| <b>lm</b>   | 8000 - 35336                                          |                                                         |
| <b>lm/W</b> | Up to 150                                             |                                                         |
| <b>K</b>    | 3000 / 4000                                           | <i>Body:</i> Die cast Aluminium                         |
| <b>°C</b>   | -40 to +50 ( 50 - 200 W)<br>-40 to + 40 (201 - 270 W) | <i>Body color:</i> RAL 9006<br><i>Mounting:</i> Pendant |
| <b>CRI</b>  | >80                                                   |                                                         |

<sup>1)</sup> Optics C01/C02/C03

<sup>2)</sup> Optics D02/D03

\* Lumen output indicated at 4000 K, CRI>80






Ø 400 x 130 mm


Dimensions

# Optic


C01




C02




C03




D02



D03



# Model name principles

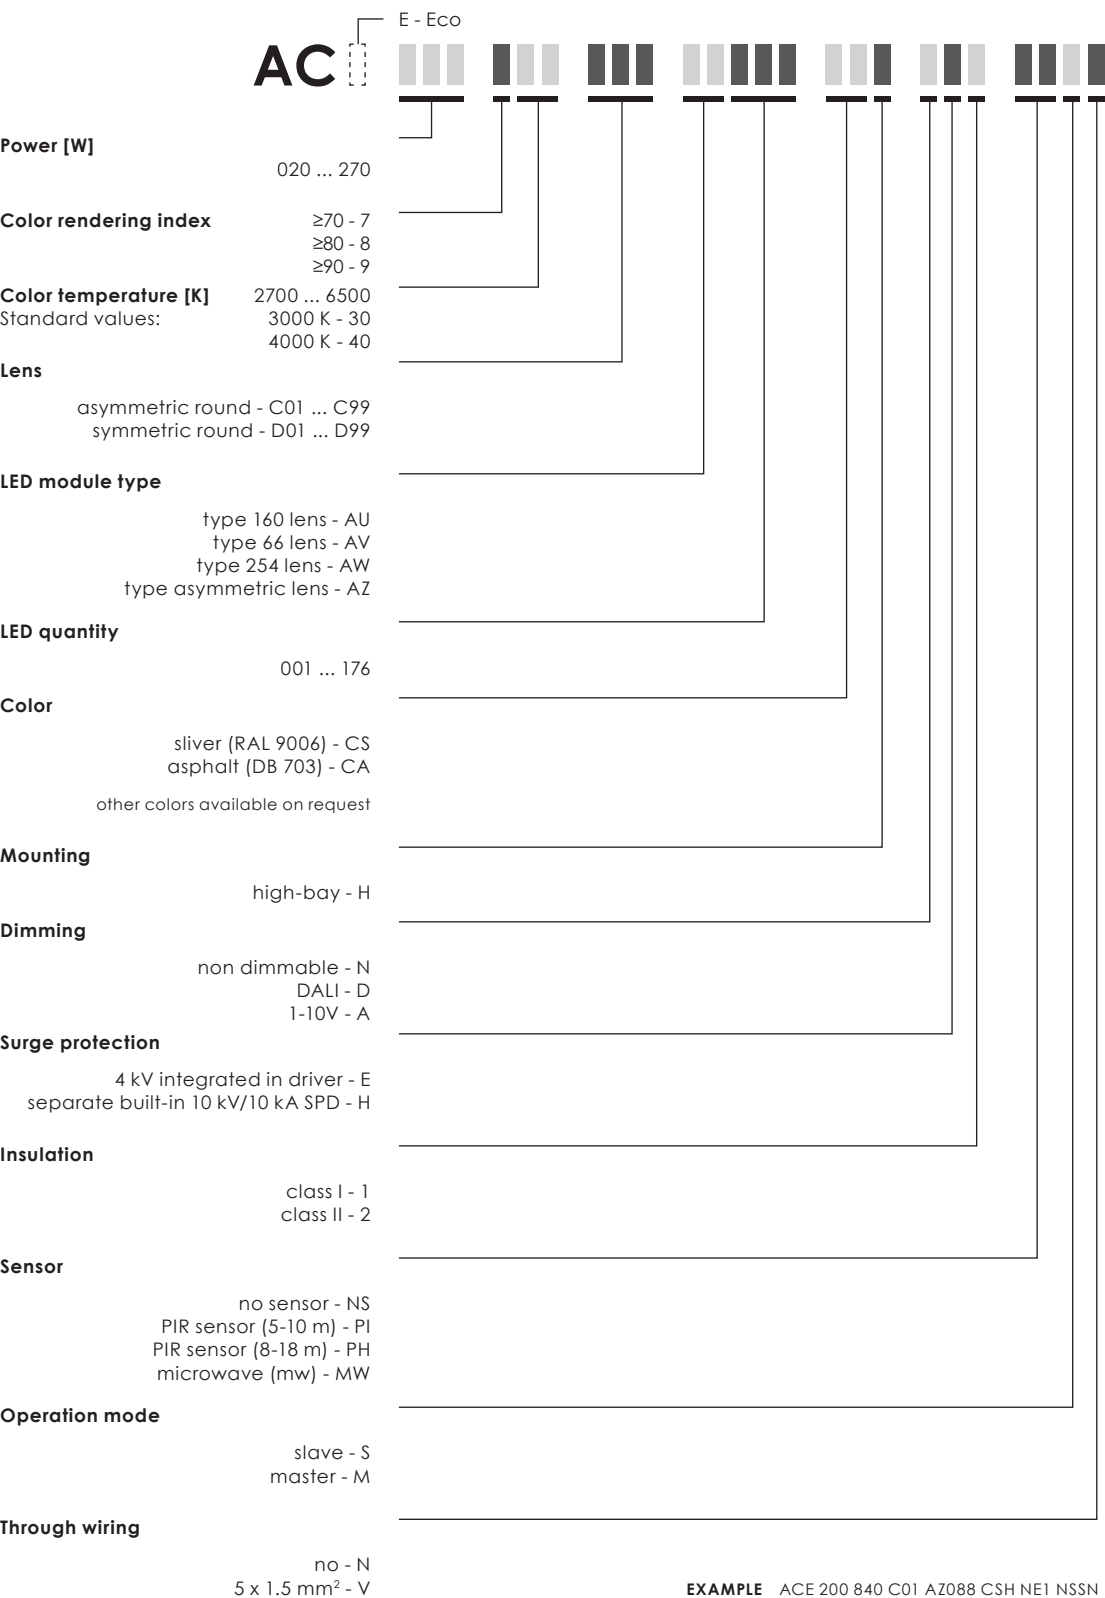

## VIZULO

Starta street 1  
Riga, LV – 1026, Latvia

Sales: + 371 67 383 023  
Production: + 371 67 383 024

office@vizulo.com  
www.vizulo.com



VIZULO



VIZULO\_PHOTO

