



vizULO

RICICLE


CE RoHS




COLOR OPTIONS




DIMENSIONS

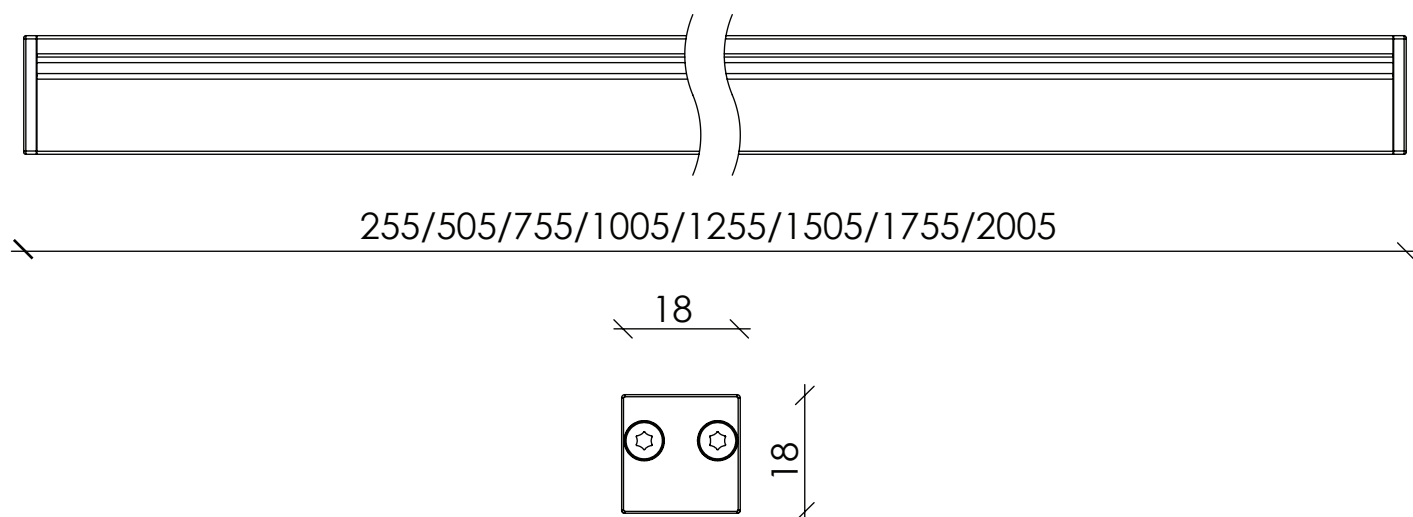

OPTICS

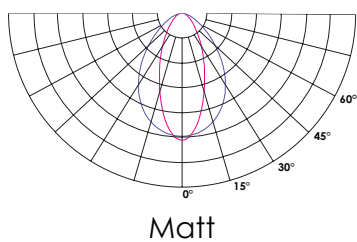

MOUNTING POSSIBILITIES

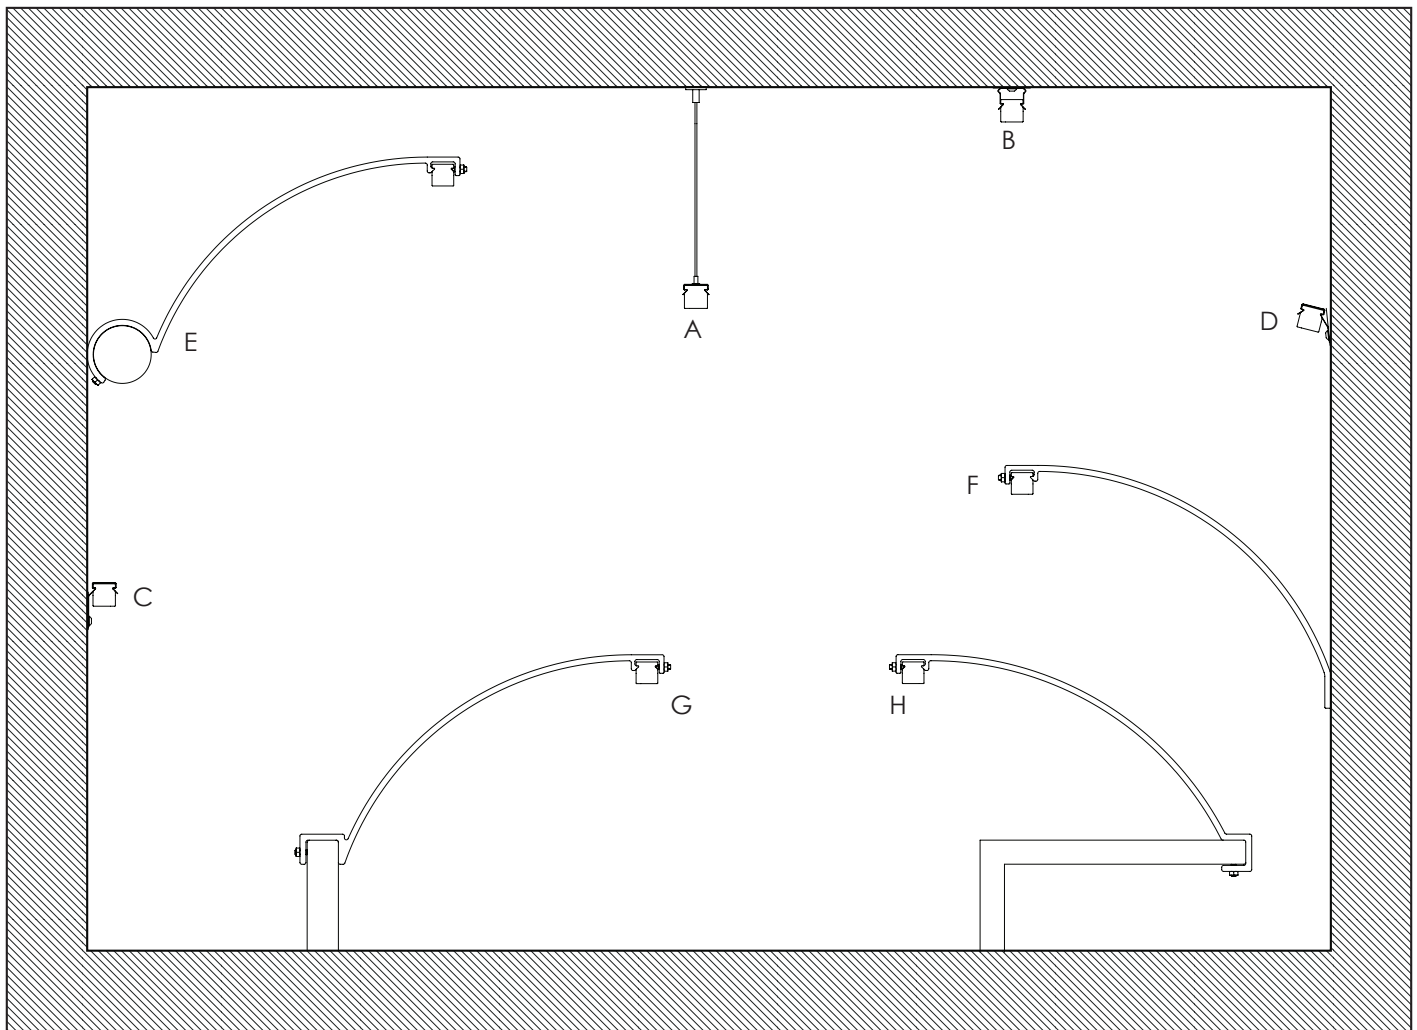

A • Suspended B • Ceiling mounted C • Wall mounted D • Wall mounted inclined

E • Mounting profile on tube F • Mounting profile on vertical surface


G • Mounting profile on vertical rectangular H • Mounting profile on horizontal rectangular support

TECHNICAL INFORMATION

Voltage	24 V
Frequency	-
Power	5 - 40 W (without driver)
Luminous flux	400 - 3200 lm
Luminous efficacy	82 lm/W (without driver)
Color rendering index	> 80
Correlated color temperature	3000; 4000 K
Chromaticity tolerance (initial MacAdam)	3
Power factor	> 0,9
Ambient temperature	-25 ... +35 °C
Ingress protection	IP20
Insulation class	III
Dimensions	600/670x111x74 mm
Body material	Extruded Aluminium
Cover type	PC Lens
Dimming	DALI
Service life	50 000 h (L90B50) at Ta = 25 °C 100 000 h (L80B50) at Ta = 25 °C
Warranty	3 years

Technical parameters for final product can differ from typical data by 10% due to special conditions of LED manufacturing processes.

MODEL NAME PRINCIPLES

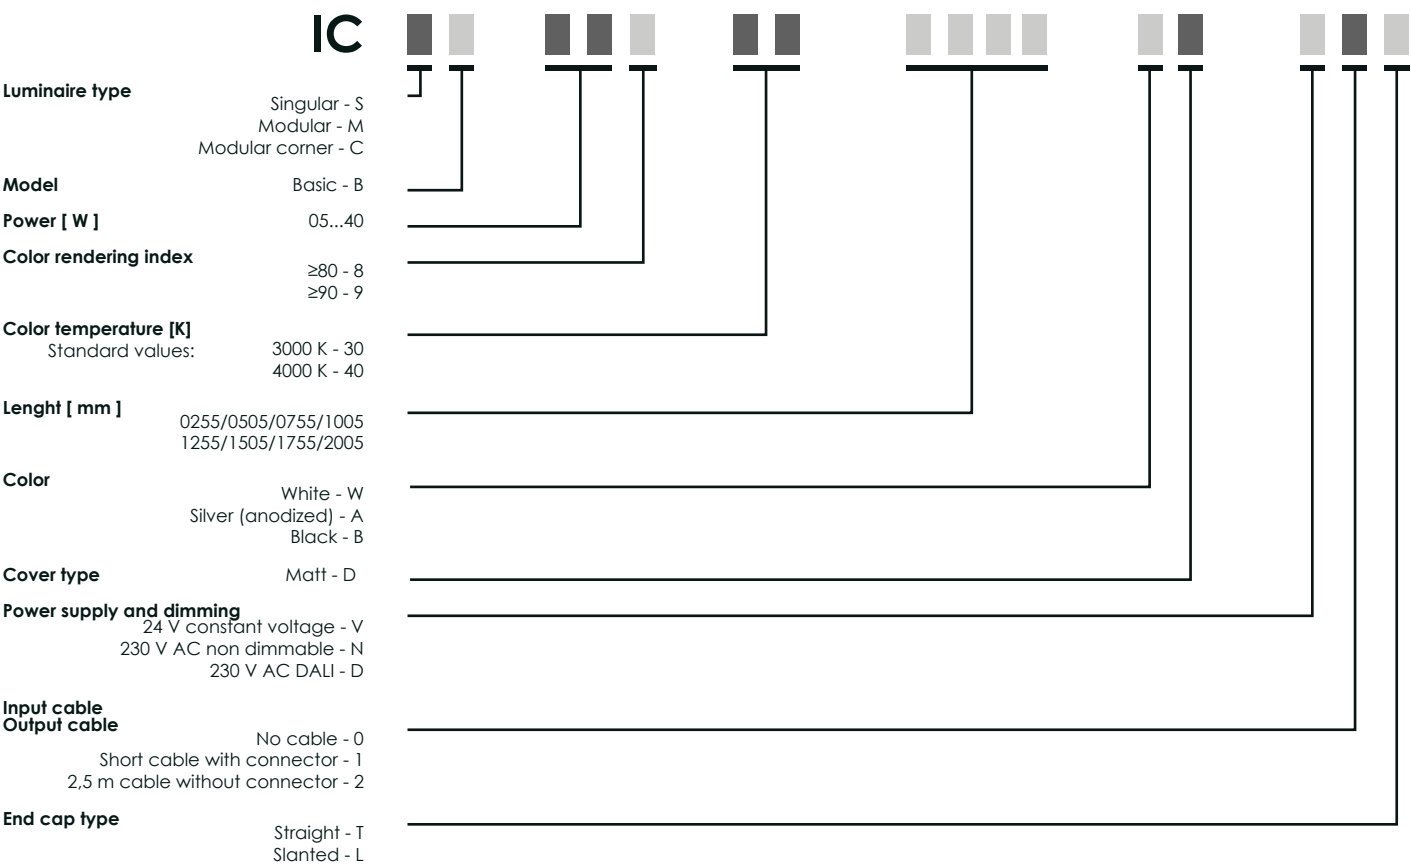

* OTHER CODES CAN BE GENERATED AFTER CUSTOMER REQUEST!