



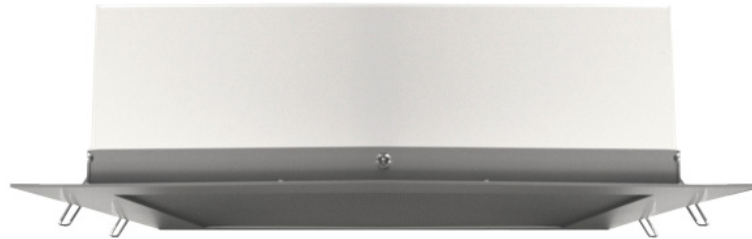

vizulo

NEST CLASSIC


CE RoHS

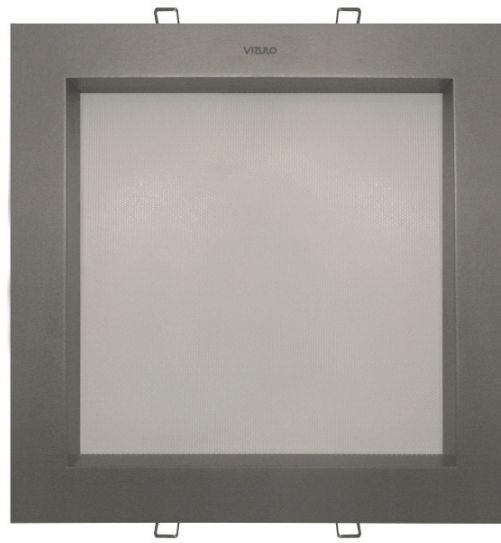


COLOR OPTIONS



DIMENSIONS

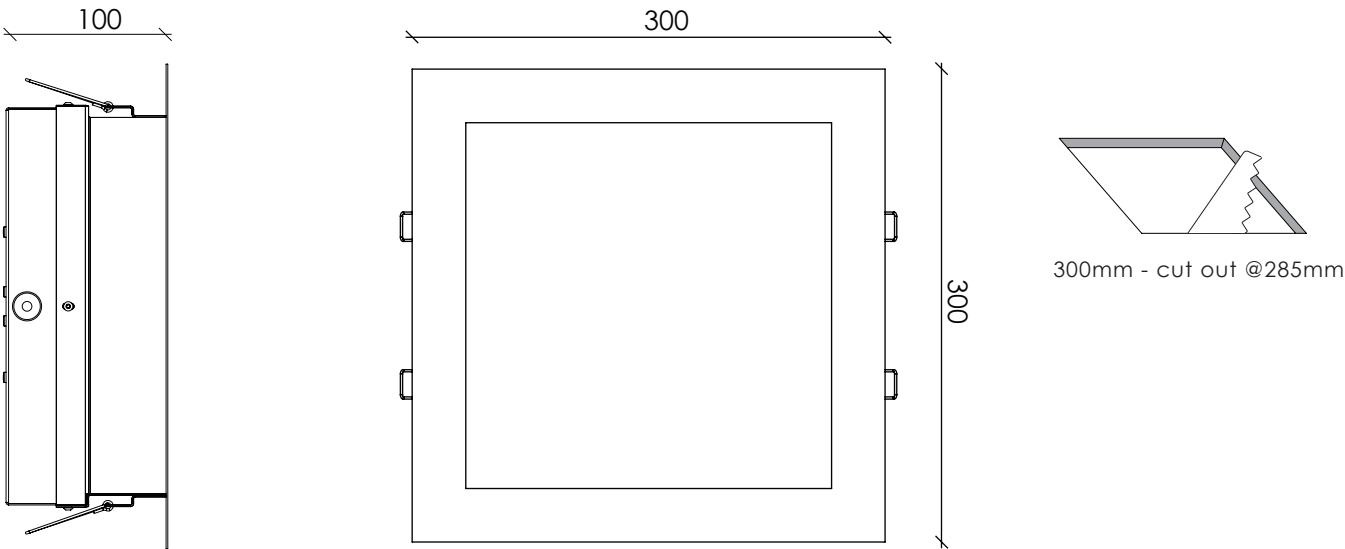

OPTICS

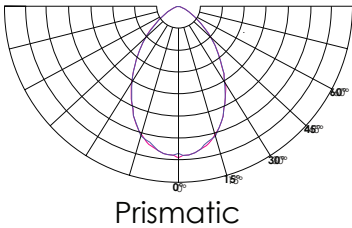

TYPE OF DIFFUSER




TECHNICAL INFORMATION

Voltage	220 ... 240 V
Frequency	50 Hz
Power	22 ... 48 W
Luminous flux	1631... 3693 lm
Luminous efficacy	70... 79 lm/W
Correlated color temperature	3000; 4000 K
Chromaticity tolerance (initial MacAdam)	3
Color rendering index	> 0,8
Power factor	>0,9
Working temperature	+10 ... +45 °C
Ingress protection	IP40
Protection class	Class II
Body material	Steel
Body color	Silver
Cover type	Prismatic
Dimming	DALI
Rated median service life	50 000 h (L90B50) at Ta = 25 °C 100 000 h (L80B50) at Ta = 25 °C
Warranty	5 years

Technical parameters for final product can differ from typical data by 10% due to special conditions of LED manufacturing processes.

ACCESSORIES



70042016 Connection cable 5x1.5mm²
(x2.5m) with open end



70042018 Connection cable 3x1.5mm²
(x2.5m) with open end

70042019 Connection cable 3x2.5mm²
(x2.5m) with open end



70042020 Connection cable 2x1.5mm²
(x2.5m) with open end

70042021 Connection cable 2x2.5mm²
(x2.5m) with open end



70042022 Connection cable 3x1.5mm²
(x2.5m) with plug

70042023 Connection cable 2x1.5mm²
(x2.5m) with plug

ACCESSORIES



70042010 Connection cable 2x1.5mm² (x2.5m)
with Ensto(NAC21S.W) 2-way plug

70042015 Connection cable 2x2.5mm² (x2.5m)
with Ensto(NAC21S.W) 2-way plug



70042009 Connection cable 5x1.5mm² (x2.5m)
with Ensto(NAC51S.W) 5-way plug



70042008 Connection cable 2x1.5mm² (x2.5m)
with Wago Winsta(770-112/041-000) 2-way plug

70042013 Connection cable 2x2.5mm² (x2.5m)
with Wago Winsta(770-112/041-000) 2-way plug




70042007 Connection cable 5x1.5mm² (x2.5m)
with Wago Winsta(770-115) 5-way plug

70042030 Connection cable with DALI 5x1.5mm² (x2.5m)
with Wago Winsta(770-1115) 5-way plug

MODEL NAME PRINCIPLES

NTC

Luminaire type	Square recessed - SR
Size [mm]	300
Distribution angle	70° - 70°
Power [W]	22/33/42/48
Color rendering index	≥80 - 8 ≥90 - 9
Color temperature [K] Standard values:	3000 K - 30 4000 K - 40
Cover type	Prismatic - P
Sealed	No (IP40) - N
Body color	Silver - S
Driver type	External - E
Dimming	Non dimmable - N DALI - D 1-10V - A
Emergency	No emergency - 0

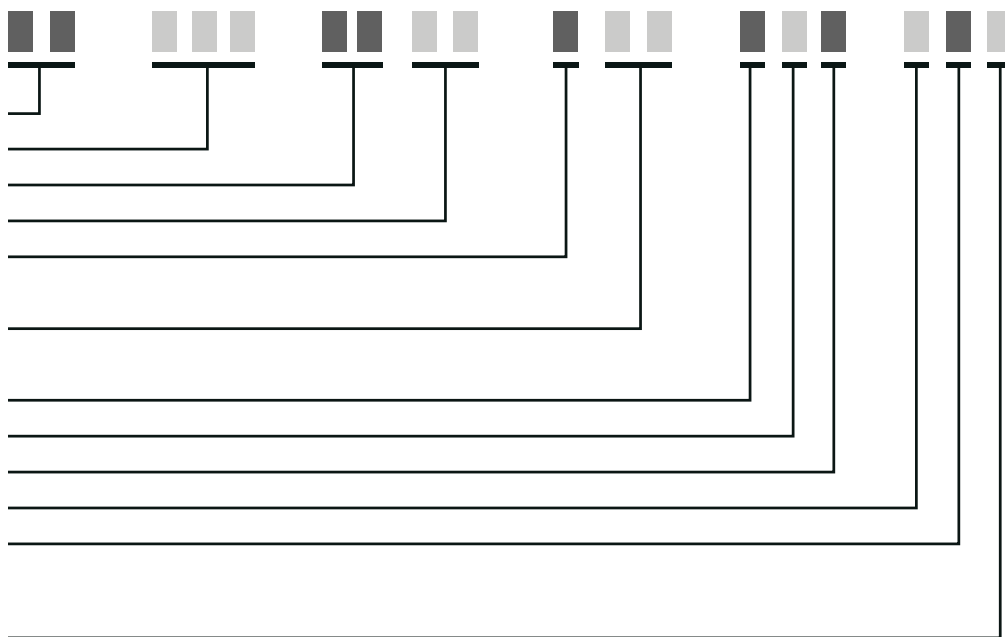

* OTHER CODES CAN BE GENERATED AFTER CUSTOMER REQUEST!