



vizulo

Pine
RECESSED

CE RoHS

V 220 - 240
Hz 50 - 60
W 9 - 54
lm Up to 8000
lm/W Up to 150
K 3000 / 4000
°C +10 to +35
CRI >80

Chromaticity tolerance (initial MacAdam): 3
DALI / Non dimmable
Sensor: Light and presence sensor
Mounting: Recessed
Body material: Aluminium
Body color: Silver / White - RAL 9016
50 000 h (L90B50) at Ta = 25 °C
100 000 h (L80B50) at Ta = 25 °C
Warranty 5 years




RoHS
IP20

Total lumen output for final product can differ from typical data by 7% due to special conditions of LED manufacturing processes.

Last modified | **2020, 7 April**
Data subject to change




| Dimensions

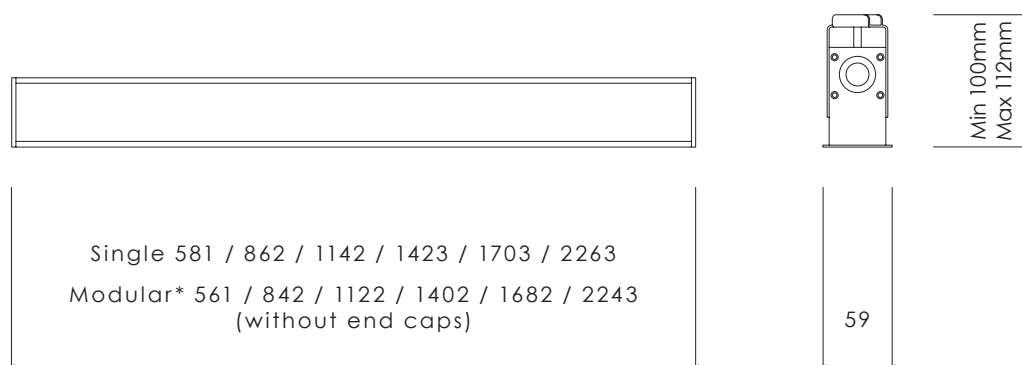


* Max 20 m line with one AC input cable



| Optic




Symmetric



Asymmetric

| Accessories



70042016 Connection cable 5x1.5mm² (x2.5m) with open end



70042018 Connection cable 3x1.5mm² (x2.5m) with open end



70042022 Connection cable 3x1.5mm² (x2.5m) with plug




70042009 Connection cable 5x1.5mm² (x2.5m) with Ensto(NAC51S.W) 5-way plug



70042030 Connection cable with DALI 5x1.5mm² (x2.5m) with Wago Winsta(770-1115) 5-way plug

Model name principles

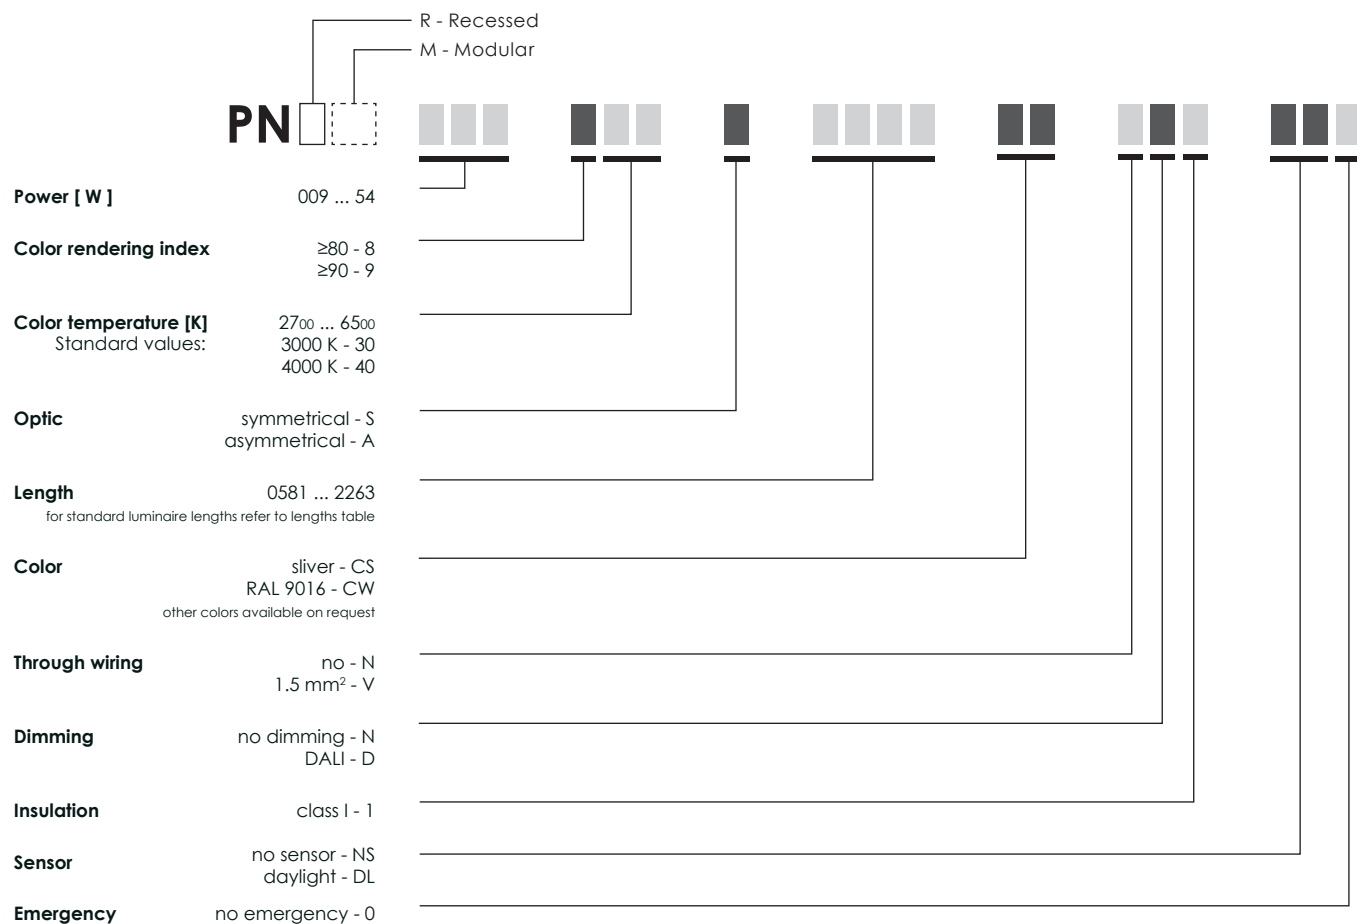

EXAMPLE PNRM 009 830 S 0581 CZ NN1 NS0

Single cut out, mm	Single fill size, mm	Modular cut out*, mm	End caps, mm	End caps + flange, mm	Power, W
52 x 569	59 x 581	52 x 561	8	20	9 - 16
52 x 850	59 x 862	52 x 842			12 - 23
52 x 1130	59 x 1142	52 x 1122			16 - 29
52 x 1411	59 x 1423	52 x 1402			19 - 35
52 x 1691	59 x 1703	52 x 1682			23 - 41
52 x 2251	59 x 2263	52 x 2243			29 - 54

*length without end caps

| High quality components

LEDs used



Samsung Midpower

Drivers used

First Priority Non dimmable

TRIDONIC



Second Priority Non dimmable

OSRAM



HELVAR



First Priority Dali

TRIDONIC



Second Priority Dali

OSRAM



HELVAR



| **VIZULO**

Starta street 1
Riga, LV – 1026, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

office@vizulo.com
www.vizulo.com



VIZULO



VIZULO_PHOTO

